


COPA MANDRIL HIDRAULICA DE 3 MORDAZAS 3-780-1800

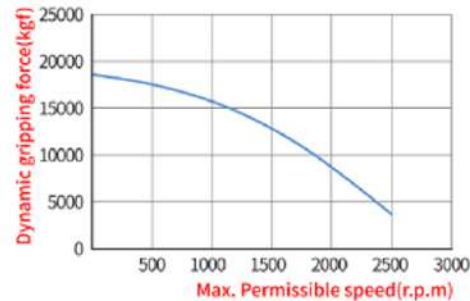

Chuck Size	in	18
Thru Hole	in(mm)	4.646 (118)
Jaw Stroke	in(mm)	0.417 (10.6)
Plunger Stroke	in(mm)	0.906 (23)
Gripping Dia Max	in(mm)	17.717 (450)
Gripping Dia Min	in(mm)	1.181 (30)
Max Permissible Input Force	lbf(kgf)	15928 (7240)
Max Gripping Force	lbf(kgf)	40381 (18355)
Max Speed	RPM	2000
Weight	lb (kg)	391.6 (178)
Moment of Inertia	lb*ft ²	3.912

DIAMETRO DE 18" 450MM
MONTAJE PLAIN BACK TYPE B-200
CUERPO EN ACERO, RPM 2000

A	in(mm)	17.717 (450)
B	in(mm)	5.866 (149)
C	in(mm)	14.961 (380)
F	in(mm)	0.236 (6)
G	in(mm)	12.598 (320)
H	in(mm)	9.252 (235)
J	in(mm)	4.646 (118)
K		6 - M20
L	in(mm)	1.102 (28)
M	in(mm)	1.693 (43)
N max	in(mm)	3.228 (82)
N min	in(mm)	3.02 (76.7)
O max	in(mm)	2.906 (73.8)
O min	in(mm)	0.72 (18.3)
P max	in(mm)	1.299 (33)
P min	in(mm)	0.394 (10)
Q	in(mm)	2.441 (62)
R	in(mm)	0.866 (22)
S	in(mm)	1.535 (39)
T	in(mm)	0.197 (5)
U max		M130x2.0
V		3-M10
W	in(mm)	5.472 (139)
X	in(mm)	2.362 (60)
Y	in(mm)	2.756 (70)
Z	in(mm)	6.496 (165)

