


# COPA MANDRIL HIDRAULICA DE 3 MORDAZAS 3-780-1200

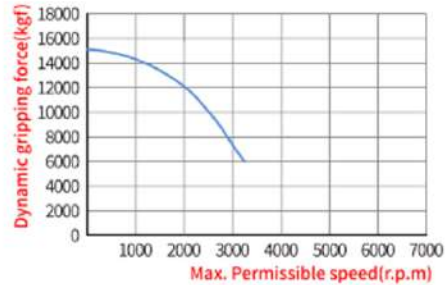

Chuck Dia	in	12
Thru Hole	in(mm)	3.583 (91)
Jaw Stroke	in(mm)	0.402 (10.2)
Plunger Stroke	in(mm)	0.945 (24)
Gripping Dia Max	in(mm)	1.197 (30.4)
Gripping Dia Min	in(mm)	1.339 (34)
Max Permissible Input Force	lbf(kgf)	13015.2 (5916)
Max Speed	RPM	3300
Max Gripping Force	lbf(kgf)	33000 (15000)
Weight	lb (kg)	140.8 (64)
Moment of Inertia	lb*ft <sup>2</sup>	0.6267

**DIAMETRO DE 12" 300MM**  
**MONTAJE PLAIN BACK TYPE B-200**  
**CUERPO EN ACERO, RPM 3300**

A	in(mm)	11.969 (304)
B	in(mm)	5 (127)
C	in(mm)	8.661 (220)
F	in(mm)	0.236 (6)
G	in(mm)	7.48 (190)
H	in(mm)	6.748 (171.4)
J	in(mm)	3.583 (91)
K	in(mm)	6-M16
L	in(mm)	0.984 (25)
M		1.181 (30)
N max	in(mm)	2.445 (62.1)
N min	in(mm)	2.232 (56.7)
O max	in(mm)	1.772 (45)
O min	in(mm)	0.591 (15)
P max	in(mm)	1.102 (28)
P min	in(mm)	0.157 (4)
Q	in(mm)	1.969 (50)
R	in(mm)	0.827 (21)
S	in(mm)	1.102 (28)
T	in(mm)	0.079 (2)
U max		M100x2.0
V		3-N8
W	in	4.252 (108)
X	in	1.181 (30)
Y	in	2.008 (51)
Z	in	4.37 (111)

